



On behalf of STA

Certification Body : **CNA-PayCert**

48 rue Montmartre

75002 Paris

France

Paris, 06/09/2019

Ms. Insa NAGELS
Nagels Druck GmbH
Hooghe Weg 11
47906 KEMPEN
GERMANY

CEN TS 16794 Compliance Certificate - PICC

Certificate Number: CNAPC/PIC-00015
Product/System name: TimeTIC Clap 1.0 (commercial identification)
Compliant with : CEN/TS 16794-2:2017
Operational temp. range : Class I (-10°C to +50°C)
ISO 14443 antenna class : Class 1
Protocol supported : type B

Dear Ms. Insa NAGELS,

CNA-PayCert has received a request, submitted by Nagels Druck GmbH, your company, for the Certification of the PICC product TimeTIC Clap 1.0 (IC type: SLE77CLFxyP, Application Type: Calypso Light Application (CLAP)), hereafter referred to as the Product and identified above as "TimeTIC Clap 1.0".

In connection with your request, we have received your Implementation Conformance Statement (ICS), referred to as PAY.STM.PICC.CEN16794.2017.2019-016 and we have assessed your Test Report(s) (ref. (analog) : IC.E.RE.1908.003_v1.0, (digital) : IC.E.RE.1908.004_v1.0), which was generated by ICUBE, following the Test Plan "CEN/TS 16794-1:2017".

Based on these elements, as indicated in PayCert's Certification Report (ref. CER/EVR/PIC/2019-073 v1.0.0) the Certification Body has found reasonable evidence that the submitted samples of the Product complies to the CEN/TS 16794-2:2017.



On behalf of STA

Certification Body : **CNA-PayCert**

48 rue Montmartre

75002 Paris

France

The Certification Body hereby grants the Product Certification of compliance with the requirements stated by the CEN/TS 16794-2:2017 standard and will include your Product in the certified products list, published on CNA-PayCert website (<http://cna-paycert-certification.com>).

Please note that the present Certification is subject to the following terms and conditions as listed hereafter :

i) The present Certification is granted on the basis of the Smart Ticketing Alliance Certification Policy and therefore is valid as of today and will expire on the 06/09/2026.

ii) If the Product is changed, Nagels Druck GmbH must notify the Certification Body of this fact in writing. Any change in the Product that may generate a different behaviour with respect to the CEN/TS 16794-2:2017 standard or a difference in the Product Implementation Conformance Statement will be considered a major modification subject to a new evaluation in order to maintain the present Certification.

iii) The present Certification granted to Nagels Druck GmbH for the above referenced Product is non-transferable to any other vendor.

The Certification Body has the right to terminate or revoke the Certification should any of the aforementioned terms and conditions be not respected.

Name: Ludovic VERECQUE

Title: General Manager



On behalf of STA

Certification Body : **CNA-PayCert**

48 rue Montmartre

75002 Paris

France

1.1 PICC Product Description

[PICC1]Administrative data

[PICC1.1] (*)Brand name: TimeTIC CLAP

[PICC1.2] (*)Trade name: TimeTIC CLAP

[PICC1.3a] (*)

Hardware version: 1.0

[PICC1.3b] (*) Software version: 1.0

[PICC1.4] (*)PICC features ISO/IEC 7816 contact interface (dual): Yes No


[PICC1.5] (*)IC manufacturer: Infineon

[PICC1.6] (*)IC reference / size: SLE77CLFxyP(M)

1.2 PICC General Technical Characteristics

[PICC2]General technical characteristics

[PICC2.2] (*) Reference of PICC Zero Point (target ID-marked on sample or photo or diagram):

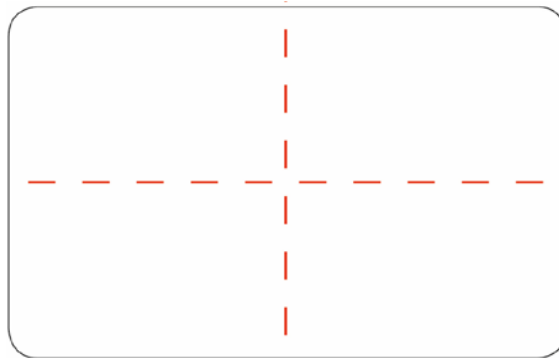

Click here to enter text.

[PICC2.3] (*)Operational temperature range supported:

Class A (Ambient)

Class I (-10 °C to + 50 °C)

[PICC2.4] (*)Antenna class according to ISO/IEC 14443:

Unclassified

"Class 1"

"Class 2"

"Class 3"



On behalf of STA

Certification Body : **CNA-PayCert**

48 rue Montmartre

75002 Paris

France

1.3 PICC Supported Options

[PICC3] Protocol characteristics

[PICC3.1] (*) Protocol(s) supported: Type A Type B Other: [Click here to enter text.](#)

[PICC5] Type B (where applicable)

[PICC5.1] (*) PCD -> PICC bit rates supported: fc/128 (~106 kbit/s)

Other: 212 kbit/s 424 kbit/s 848 kbit/s

[PICC5.2] (*) PICC -> PCD bit rates supported: fc/128 (~106 kbit/s)

Other: 212 kbit/s 424 kbit/s 848 kbit/s

[PICC5.3] (*) Only symmetrical bit rates supported: Yes No

[PICC5.4] (*) PUPI value: Fixed number Random number

[PICC5.9] (*) Extended ATQB support: Yes No

If yes, SFGI: [Click here to enter text.](#)

[PICC5.10] (*) S(PARAMETERS) support: Yes No

[PICC5.11] (*) All AFIs are supported: Yes No

If not, indicate all supported AFI(s): 00h

[PICC5.12] (*) REQW/WUPB with N > 1 support: Yes No