



PayCert
48 rue Montmartre
75002 Paris
France

Paris, 23 janvier 2024

Thales DIS France SAS
ZI Athelia IV, av. du Jujubier
13705 La Ciotat
FRANCE

CEN TS 16794 Compliance Certificate - PICC

A Smart Ticketing Alliance certification program

Certificate Number: CNAPC/PIC-00048
Product/System name: Gemalto Calypso Prime G3 (commercial identification)
Compliant with : CEN/TS 16794-1:2017
Operational temp. range : Class I (-10°C to +50°C)
ISO 14443 antenna class : Class 1
Protocol supported : Type A

Dear Customer,

The Certification Body PayCert has received a request, submitted by Thales DIS France SAS, your company, for the Certification of the PICC product Gemalto Calypso Prime G3 (IC: SLC36PDL352; Software: Calypso G3 v1.0; Application type: Calypso V3.3 Ed2; Antenna: 0115GXLA; Card body: PVC/PET; Dual card), hereafter referred to as the Product and identified above as "Gemalto Calypso Prime G3".

In connection with your request, we have received your Implementation Conformance Statement (ICS), referred to as PAY.THA.PICC.CEN16794.2017.2023-025 dated 29/12/2023 and we have assessed your Test Report(s) (ref. IC.E.RE.2312.006_v1.0), which was generated by ICUBE TESTING CENTER, following the Test Plan "CEN/TS 16794-2:2017".

Based on these elements, as indicated in PayCert's Certification Report (ref. CER/EVR/PIC/2024-002 v1.0.0) the Certification Body has found reasonable evidence that the submitted samples of the Product complies to the CEN/TS 16794-1:2017.

The Certification Body hereby grants the Product Certification of compliance with the requirements stated by the CEN/TS 16794-1:2017 standard and will include your Product in the certified products list, published on PayCert website (<http://cna-paycert-certification.com>).



PayCert
48 rue Montmartre
75002 Paris
France

Please note that the present Certification is subject to the following terms and conditions as listed hereafter :

i) The present Certification is granted on the basis of the Smart Ticketing Alliance Certification Policy and therefore is valid as of today and will expire on the 22 January 2031.

ii) If the Product is changed, Thales DIS France SAS must notify the Certification Body of this fact in writing. Any change in the Product that may generate a different behaviour with respect to the CEN/TS 16794-1:2017 standard or a difference in the Product Implementation Conformance Statement will be considered a major modification subject to a new evaluation in order to maintain the present Certification.

iii) The present Certification granted to Thales DIS France SAS for the above referenced Product is non-transferable to any other vendor.

The Certification Body has the right to terminate or revoke the Certification should any of the aforementioned terms and conditions be not respected.

Name: Laurence MASSON

Title: Chief Operating Officer





PayCert
48 rue Montmartre
75002 Paris
France

a. PICC Product Description

[PICC1] Administrative data

[PICC1.1] (*) Brand name: Gemalto Calypso Prime G3

[PICC1.2] (*) Trade name: Gemalto Calypso Prime G3

[PICC1.3a] (*) Hardware version: SLC36PDL352

[PICC1.3b] (*) Software version: V1.0

[PICC1.4] (*) PICC features ISO/IEC 7816 contact interface (dual): Yes No

[PICC1.5] (*) IC manufacturer: INFINEON

[PICC1.6] (*) IC reference / size: SLC36PDL352

[PICC1.9] (*) Type of card body structure: PVC/PET

The PICC is based on a STA certified PICC (*): Yes No


If yes STA PICC certificate number (*): CNAPC/PIC-00045

If yes rationale to justify the delta-certification (*): dual in place of Full contactless

b. PICC General Technical Characteristics

[PICC2] General technical characteristics

[PICC2.2] (*) Reference of PICC Zero Point (target ID-marked on sample or photo or diagram):

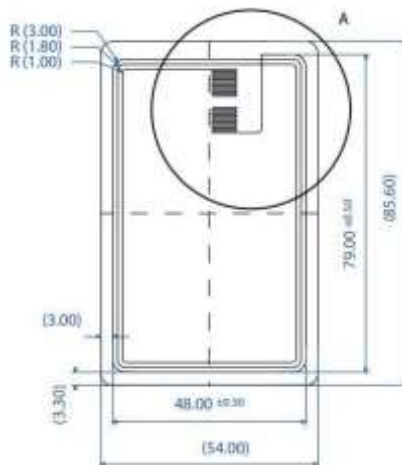

[Click here to enter text.](#)

[PICC2.3] (*) Operational temperature range supported:

- Class A (Ambient)
 Class I (-10 °C to + 50 °C)



PayCert

48 rue Montmartre

75002 Paris

France

[PICC2.4] (*) Antenna class according to ISO/IEC 14443:

Unclassified "Class 1" "Class 2" "Class 3"

c. PICC Supported Options

[PICC3] Protocol characteristics

[PICC3.1] (*) Supported communication signal interface(s) and protocol(s): Type A Type B

Other: [Click here to enter text.](#)

[PICC4] Type A (where applicable)

[PICC4.1] (*) PCD -> PICC bit rates supported: fc/128 (~106 kbit/s)

Other: 212, 424, 848

[PICC4.2] (*) PICC -> PCD bit rates supported: fc/128 (~106 kbit/s)

Other: 212, 424, 848

[PICC4.3] (*) Only symmetrical bit rates supported: Yes No

[PICC4.5] (*) UID value: Fixed number Random number

[PICC4.11] (*) S(PARAMETERS) support: Yes No

[PICC5] Type B (where applicable)

[PICC5.1] (*) PCD -> PICC bit rates supported: fc/128 (~106 kbit/s)

Other: [Click here to enter text.](#)

[PICC5.2] (*) PICC -> PCD bit rates supported: fc/128 (~106 kbit/s)

Other: [Click here to enter text.](#)

[PICC5.3] (*) Only symmetrical bit rates supported: Yes No

[PICC5.4] (*) PUPI value: Fixed number Random number

[PICC5.9] (*) Extended ATQB support: Yes No

If yes, SFGI: [Click here to enter text.](#)

[PICC5.10] (*) S(PARAMETERS) support: Yes No

[PICC5.11] (*) All AFIs are supported: Yes No

If not, indicate all supported AFI(s): [Click here to enter text.](#)

[PICC5.12] (*) REQW/WUPB with N > 1 support: Yes No